



SERIE "CT"

WROUGHT IRON SCROLLS IN COMBINATION WITH CAST LEAVES



CTC-105HM (12x12)
0.760 kg.-1.675 lbs.
CTC-116 (dia.12)
0.620 kg.-1.366 lbs.

mm. 160 x 265
6-5/16" x 10-7/16"



CTC-205HM (12x12)
0.670 kg.-1.477 lbs.
CTC-216 (dia.12)
0.545 kg.-1.201 lbs.
(Specify Left or Right)

mm. 160 x 230
6-5/16" x 9-1/16"



mm. 180 x 295
7-1/8" x 11-5/8"

CTAC-105HM (12x12)
0.890 kg.-1.962 lbs.
CTAC-116 (dia 12)
0.725 kg.-1.598 lbs.
(Specify Left or Right)



mm. 210 x 330
8-2/8" x 13"

CTAC-205HM (12x12)
1.120 kg.-2.468 lbs.
CTAC-216 (dia 12)
0.950 kg.-2.094 lbs.
(Specify Left or Right)



mm. 255 x 425
10-1/16" x 16-6/8"

CTAC-305HM (12x12)
1.380 kg.-3.042 lbs.
CTAC-316 (dia 12)
1.175 kg.-2.590 lbs.
(Specify Left or Right)



mm. 230 x 310
9-1/16" x 12-3/16"

CTAC-405HM (12x12)
1.220 kg.-2.689 lbs.
CTAC-416 (dia 12)
1.035 kg.-2.281 lbs.
(Specify Left or Right)



Hot Forged Curl out of square 12 mm.



mm. 180 x 300
9-1/16" x 12-3/16"

CTAC-505HM (12x12)
0.990 kg.-2.182 lbs.
CTAC-516 (dia 12)
0.830 kg.-1.829 lbs.
(Specify Left or Right)

copy right reproduction prohibited



SERIE "CT"

WROUGHT IRON SCROLLS IN COMBINATION WITH CAST LEAVES




CTS-105HM (12x12)
0.810 kg.-1.785 lbs.
CTS-116 (dia.12)
0.665 kg.-1.466 lbs.
(Specify Left or Right)
mm. 185 x 323
7-5/16" x 12-6/8"



CTS-205HM (12x12)
0.980 kg.-2.160 lbs.
CTS-216 (dia.12)
0.800 kg.-1.763 lbs.
(Specify Left or Right)
mm. 175 x 360
6-14/16" x 14-1/8"



CTS-305HM (12x12)
1.100 kg.-2.424 lbs.
CTS-316 (dia.12)
0.880 kg.-1.940 lbs.
(Specify Left or Right)
mm. 195 x 395
7-4/8" x 15-4/8"

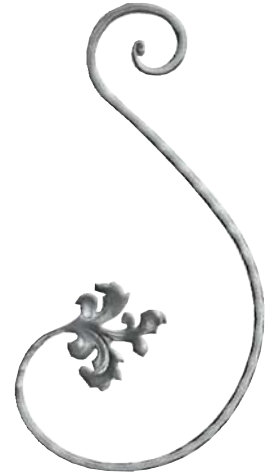

CTS-405HM (12x12)
1.545 kg.-3.405 lbs.
CTS-416 (dia.12)
1.300 kg.-2.865 lbs.
(Specify Left or Right)
mm. 260 x 530
10-2/8" x 20-7/8"



CTS-505HM (12x12)
0.840 kg.-1.851 lbs.
CTS-516 (dia.12)
0.710 kg.-1.565 lbs.
(Specify Left or Right)
mm. 375 x 110
14-6/8" x 4-3/8"



CTS-805HM (12x12)
0.980 kg.-2.160 lbs.
CTS-816 (dia.12)
0.875 kg.-1.929 lbs.
(Specify Left or Right)
mm. 510 x 110
20-1/8" x 4-3/8"



CTS-605HM (12x12)
1.670 kg.-3.681 lbs.
CTS-616 (dia.12)
1.400 kg.-3.086 lbs.
(Specify Left or Right)
mm. 650 x 230
Inch. 25-9/16" x 9-1/16"

CTS-905HM (12x12)
1.450 kg.-3.196 lbs.
CTS-916 (dia.12)
1.200 kg.-2.645 lbs.
(Specify Left or Right)
mm. 600 x 270
Inch. 25-5/8" x 10-5/8"



CTS-705HM (12x12)
2.500 kg.-5.510 lbs.
CTS-716 (dia.12)
2.150 kg.-4.739 lbs.
(Specify Left or Right)
mm. 815 x 295
Inch. 32-1/8" x 11-5/8"

copy right reprodution prohibited